


I 8-40 (oil-lubricated)

Voltage	V	120	200	200	230	230							
Frequency	Hz	60	50	60	50	60							
Motor	HP	1.62	1.38	1.38	1.38	1.38							
	kW	1.20	1.01	1.01	1.01	1.01							
Displacement	l/min	180	150	180	150	180							
	CFM	6.36	5.30	6.36	5.30	6.36							
FAD @ 8 bar	l/min	111	96	111	96	111							
	CFM	3.92	3.39	3.92	3.39	3.92							
Max. pressure ¹⁾	bar	8	8	8	8	8							
	psi	120	120	120	120	120							
Max. current	A	18.6	8.7	8.7	8.7	8.7							
Tank size	litres	40	40	40	40	40							
	gallon	10.6	10.6	10.6	10.6	10.6							
Weight	kg	62	62	62	62	62							
	lbs	137	137	137	137	137							
Noise level	dB(A)/1m	50	50	50	50	50							
Thermal protection		Yes	Yes	Yes	Yes	Yes							
Duty cycle		50%	50%	50%	50%	50%							

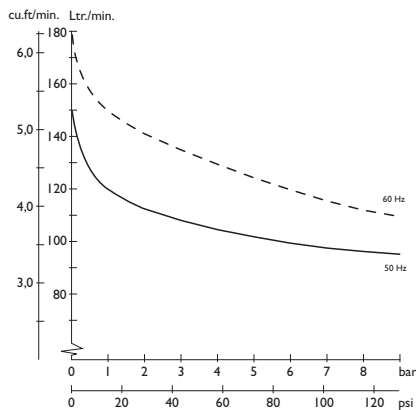

Dimensions (l x w x h)
420 x 540 x 585 mm / 16 1/8 x 21 1/8 x 23 inch

¹⁾ Higher pressure available upon request

Technical modifications reserved



JUN-AIR®

E-mail: info@jun-air.dk
Internet: www.jun-air.com