


# 2000-25M (oil-less)

Voltage	V	120	200	200	230	230	3x400 <sup>2)</sup>						
Frequency	Hz	60	50	60	50	60	50						
Motor	HP	1.50	1.50	1.50	1.50	1.50	1.50						
	kW	1.10	1.10	1.10	1.10	1.10	1.10						
Displacement	l/min	212	176	212	176	212	176						
	CFM	7.49	6.22	7.49	6.22	7.49	6.22						
FAD @ 8 bar	l/min	110	90	110	90	110	90						
	CFM	3.88	3.18	3.88	3.18	3.88	3.18						
Max. pressure	bar	8	8	8	8	8	8						
	psi	120	120	120	120	120	120						
Max. current	A	16.6	8.2	8.8	8.0	8.3	3.6						
Tank size	litres	25	25	25	25	25	25						
	gallon	6.6	6.6	6.6	6.6	6.6	6.6						
Weight	kg	95	95	95	95	95	95						
	lbs	209	209	209	209	209	209						
Noise level	dB(A)/1m	53	52	53	52	53	52						
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes						
Duty cycle		100%	100%	100%	100%	100%	100%						

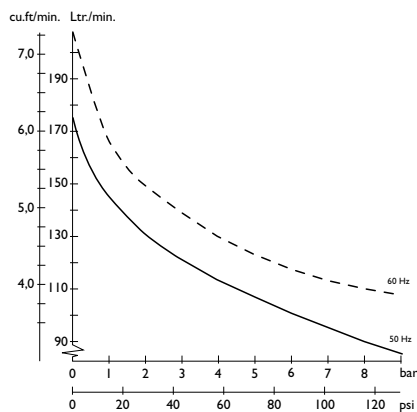

Dimensions (l x w x h)  
661 x 452 x 856 mm / 26 x 17<sup>6</sup>/<sub>8</sub> x 33<sup>6</sup>/<sub>8</sub> inch

<sup>2)</sup> Neutral is required in installation

Technical modifications reserved

**JUN-AIR**®

E-mail: [info@jun-air.dk](mailto:info@jun-air.dk)  
Internet: [www.jun-air.com](http://www.jun-air.com)

