


# 36-150 (oil-lubricated)

Voltage	V	3x200	3x200	3x208	3x400 <sup>2)</sup>	3x440 <sup>2)</sup>							
Frequency	Hz	50	60	60	50	60							
Motor	HP	2.76	2.76	2.76	2.76	2.76							
	kW	2.03	2.03	2.03	2.03	2.03							
Displacement	l/min	300	360	360	300	360							
	CFM	10.59	12.71	12.71	10.59	12.71							
FAD @ 8 bar	l/min	192	222	222	192	222							
	CFM	6.78	7.84	7.84	6.78	7.84							
Max. pressure <sup>1)</sup>	bar	8	8	8	8	8							
	psi	120	120	120	120	120							
Max. current	A	11.6	11.6	11.6	8.7	8.7							
Tank size	litres	150	150	150	150	150							
	gallon	39.6	39.6	39.6	39.6	39.6							
Weight	kg	164	164	164	164	164							
	lbs	362	362	362	362	362							
Noise level	dB(A)/1m	58	58	58	58	58							
Thermal protection		Yes	Yes	Yes	Yes	Yes							
Duty cycle		50%	50%	50%	50%	50%							

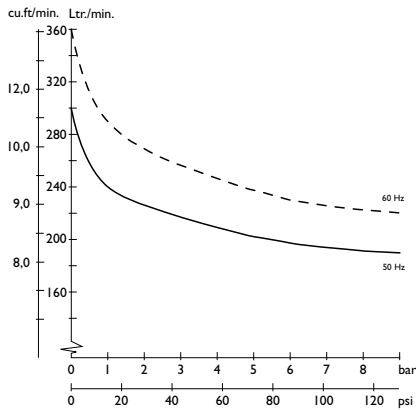

Dimensions (l x w x h)  
1280 x 460 x 760 mm / 50<sup>3</sup>/<sub>8</sub> x 18<sup>1</sup>/<sub>8</sub> x 29<sup>7</sup>/<sub>8</sub> inch

- <sup>1)</sup> Higher pressure available upon request
- <sup>2)</sup> Neutral is required

Technical modifications reserved



**JUN-AIR**®

E-mail: [info@jun-air.dk](mailto:info@jun-air.dk)  
Internet: [www.jun-air.com](http://www.jun-air.com)