


OFI 20 I-25MD2 (oil-less)

Voltage	V	100	100	120	200	200	208	230	230				
Frequency	Hz	50	60	60	50	60	60	50	60				
Motor	HP	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22				
	kW	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90				
Displacement	l/min	146	170	170	146	170	170	146	170				
	CFM	5.16	6.00	6.00	5.16	6.00	6.00	5.16	6.00				
FAD @ 8 bar/120 psi	l/min	65	75	75	65	75	75	65	75				
	CFM	2.30	2.65	2.65	2.30	2.65	2.65	2.30	2.65				
Max pressure ¹⁾	bar	8	8	8	8	8	8	8	8				
	psi	120	120	120	120	120	120	120	120				
Max. current	A	13.0	13.0	11.0	6.5	6.5	6.5	6.2	5.8				
Tank size	litres	25	25	25	25	25	25	25	25				
	gallon	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6				
Weight	kg	98	98	98	98	98	98	98	98				
	lbs	216	216	216	216	216	216	216	216				
Noise level	db(A)	58	61	61	58	61	61	58	61				
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes				
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%				

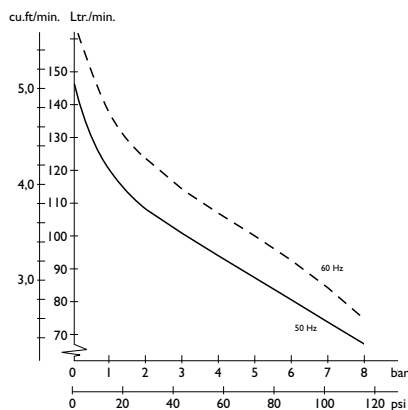

Dimensions (l x w x h)
720 x 460 x 860 mm / 28.0 x 18.0 x 34.0 inch

- ¹⁾ FAD is reduced by 18-20% on units with dryer.
Minimum pressure required to operate: 6 bar/90 psi
²⁾ Higher pressure available upon request

Technical modifications reserved

JUN-AIR 

IDEX
IDEX CORPORATION

E-mail: info@jun-air.dk
Internet: www.jun-air.com

