


# OFI 20 I-40BD2 (oil-less)

Voltage	V	100	100	120	200	200	208	230	230			
Frequency	Hz	50	60	60	50	60	60	50	60			
Motor	HP	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22			
	kW	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90			
Displacement	l/min	146	170	170	146	170	170	146	170			
	CFM	5.16	6.00	6.00	5.16	6.00	6.00	5.16	6.00			
FAD @ 8 bar	l/min	65	75	75	65	75	75	65	75			
	CFM	2.30	2.65	2.65	2.30	2.65	2.65	2.30	2.65			
Max. pressure <sup>1)</sup>	bar	8	8	8	8	8	8	8	8			
	psi	120	120	120	120	120	120	120	120			
Max. current	A	-	-	11.0	-	-	-	6.2	5.8			
Tank size	litres	40	40	40	40	40	40	40	40			
	gallon	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6			
Weight	kg	59	59	59	59	59	59	59	59			
	lbs	130	130	130	130	130	130	130	130			
Noise level	dB(A)/1m	77	80	80	77	80	80	77	80			
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes			
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%			

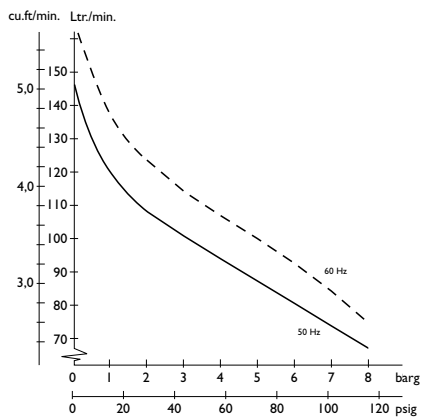

Dimensions (l x w x h)  
556 x 579 x 678 mm / 21 7/8 x 22 6/8 x 26 6/8 inch

<sup>1)</sup> Higher pressure available upon request

Technical modifications reserved



**JUN-AIR**®

E-mail: [info@jun-air.dk](mailto:info@jun-air.dk)  
Internet: [www.jun-air.com](http://www.jun-air.com)