



Features

- 100% oil free
- 100% duty cycle
- low noise and vibration level
- easy maintenance
- long-life, 2-year warranty
- 8000 hours cup life at 8bar

Description

- 5µm air filter
- pressure regulator included
- receiver with internal coating and 5-year warranty
- automatic drain of the receiver with condensate bottle
- 4 casters for easy installation
- hour meter


OTHER VERSIONS

- with dryer (2xOF302-40MQ2)


Product specifications

Model	2xOF302-40M			
Voltage	V	1x230	1x230	1x120
Frequency	Hz	50	60	60
Motor	HP	1.2	1.2	1.2
	kW	0.9	0.9	0.9
Displacement	l/min	216	276	276
Air flow @ 8bar	l/min	76	88	88
	cfm	2.68	3.11	3.11
Max. pressure	bar	8	8	8
	psi	120	120	120
Max. current	A	7.6	8.2	13.2
Receiver volume	litres	40	40	40
	gallon	10.6	10.6	10.6
Weight	kg	107	107	107
	lbs	236	236	236
Noise level	dB(A)/1m	50	50	50
Duty cycle		100%	100%	100%

Air flow / pressure curve

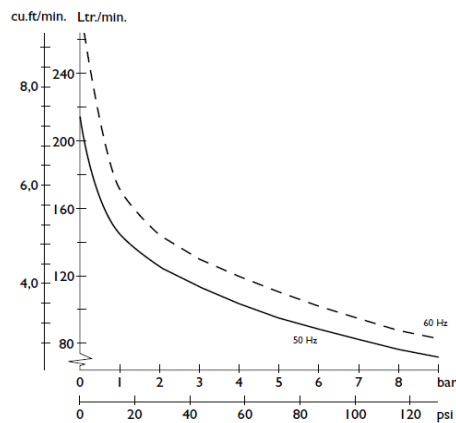

Dimensions*

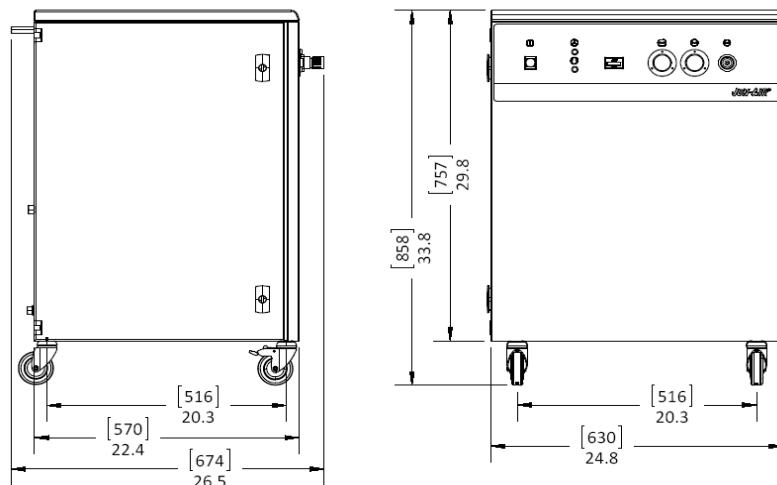

* for unit without accessories or options