



Features

- 100% oil free
- 100% duty cycle
- low noise and vibration level
- easy maintenance
- long-life, 2-year warranty
- 8000 hours piston life at 8bar

Description

- 5µm air filter
- pressure regulator included
- receiver with internal coating and 5-year warranty
- automatic drain of the receiver with condensate bottle
- 4 casters for easy installation
- hour meter


OTHER VERSIONS

- with dryer (OF302-25MQ2)
- without cabinet (OF302-25B)


Product specifications

Model	OF302-25M			
Voltage	V	1x230	1x230	1x120
Frequency	Hz	50	60	60
Motor	HP	0.6	0.6	0.6
	kW	0.44	0.44	0.44
Displacement	l/min	108	138	138
Air flow @ 8bar	l/min	38	44	44
	cfm	1.34	1.55	1.55
Max. pressure	bar	8	8	8
	psi	120	120	120
Max. current	A	3.8	4.1	6.6
Receiver volume	litres	25	25	25
	gallon	6.6	6.6	6.6
Weight	kg	78	78	78
	lbs	172	172	172
Noise level	dB(A)/1m	47	48	48
Duty cycle		100%	100%	100%

Air flow / pressure curve

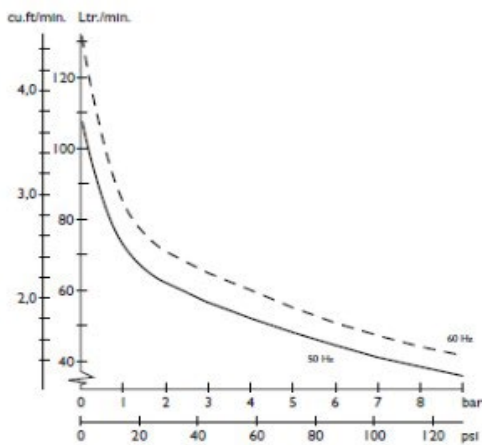

Dimensions* mm [in]

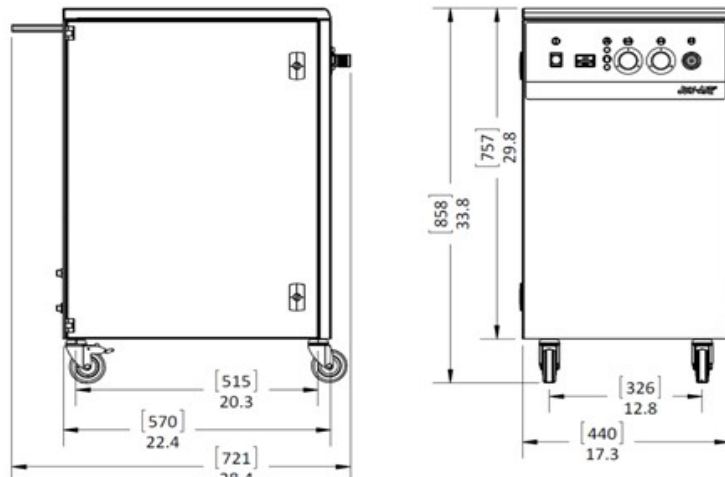

* for unit without accessories or options