



### Features

- 100% oil free
- 100% duty cycle
- low noise and vibration level
- easy maintenance
- long-life, 2-year warranty
- 8000 hours piston life at 8bar

### Description

- 5µm air filter
- pressure regulator included
- receiver with internal coating and 5-year warranty
- automatic drain of the receiver with condensate bottle
- 4 casters for easy installation
- hour meter


### OTHER VERSIONS

- with dryer (OF302-4MQ2)
- without cabinet (OF302-4B)

### Product specifications

Model	OF302-4M			
Voltage	V	1x230	1x230	1x120
Frequency	Hz	50	60	60
Motor	HP	0.6	0.6	0.6
	kW	0.44	0.44	0.44
Displacement	l/min	108	138	138
Air flow @ 8bar	l/min	38	44	44
	cfm	1.34	1.55	1.55
Max. pressure	bar	8	8	8
	psi	120	120	120
Max. current	A	3.8	4.1	6.6
	Receiver volume	litres	4	4
Weight	gallon	1.1	1.1	1.1
	kg	78	78	78
Weight	lbs	172	172	172
	Noise level	dB(A)/1m	47	48
Duty cycle		100%	100%	100%

### Air flow / pressure curve

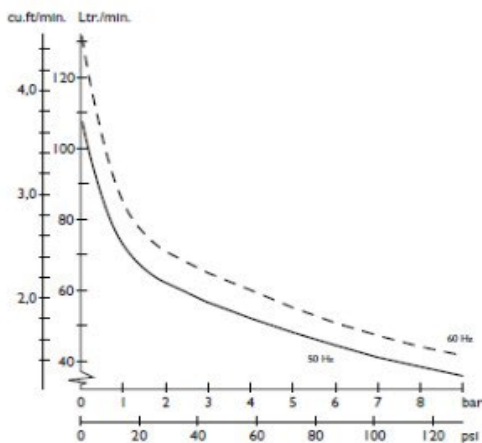

### Dimensions\* mm [in]



\* for unit without accessories or options