


OFI 202-40M (oil-less)

| | | | | | | | | | | | | | | | |
|----------------------------|--------|-------|-------|-------|-------|--|--|--|--|--|--|--|--|--|--|
| Voltage | V | 230 | 230 | 3x400 | 3x400 | | | | | | | | | | |
| Frequency | Hz | 50 | 60 | 50 | 60 | | | | | | | | | | |
| Motor | HP | 2.0 | 2.0 | 2.0 | 2.0 | | | | | | | | | | |
| | kW | 1.47 | 1.47 | 1.47 | 1.47 | | | | | | | | | | |
| Displacement | l/min | 290 | 328 | 290 | 328 | | | | | | | | | | |
| | CFM | 10.24 | 11.58 | 10.24 | 11.58 | | | | | | | | | | |
| FAD @ 8 bar/120 psi | l/min | 130 | 146 | 130 | 146 | | | | | | | | | | |
| | CFM | 4.59 | 5.16 | 4.59 | 5.16 | | | | | | | | | | |
| Max pressure ¹⁾ | bar | 8 | 8 | 8 | 8 | | | | | | | | | | |
| | psi | 120 | 120 | 120 | 120 | | | | | | | | | | |
| Max. current | A | 8 | 9 | 5 | 5 | | | | | | | | | | |
| Tank size | litres | 40 | 40 | 40 | 40 | | | | | | | | | | |
| | gallon | 10.6 | 10.6 | 10.6 | 10.6 | | | | | | | | | | |
| Weight | kg | 116 | 116 | 116 | 116 | | | | | | | | | | |
| | lbs | 256 | 256 | 256 | 256 | | | | | | | | | | |
| Noise level | db(A) | 60 | 63 | 60 | 63 | | | | | | | | | | |
| Thermal protection | | Yes | Yes | Yes | Yes | | | | | | | | | | |
| Duty cycle | | 100% | 100% | 100% | 100% | | | | | | | | | | |

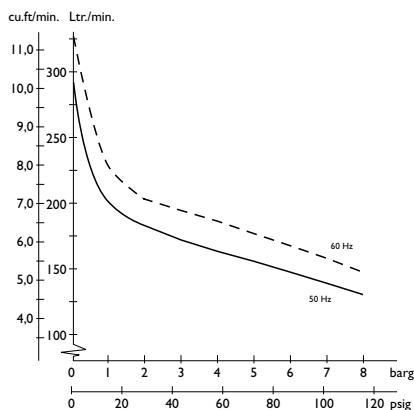

Dimensions (l x w x h)
661 x 643 x 856 mm / 26 x 25³/₈ x 33⁶/₈ inch

¹⁾ Higher pressure available upon request

Technical modifications reserved

JUN-AIR 

IDEX
IDEX CORPORATION

E-mail: info@jun-air.dk
Internet: www.jun-air.com

